

by

DEPARTMENT OF THE NAVY
OFFICE OF NAVAL RESEARCH, POWER BRANCH

15 Contract N00014-76-C-0540

Project No. NR 094-363



IN NO. ILE COPY

This document has been approved for public release and sale; its distribution is unlimited. Reproduction in whole or in part is permitted for any purpose of the United States Government.

STEVENS INSTITUTE OF TECHNOLOGY
DEPARTMENT OF MECHANICAL ENGINEERING

334 580

mt


DYNAMIC STALL OF AN AIRFOIL WITH LEADING EDGE BUBBLE SEPARATION INVOLVING TIME DEPENDENT RE-ATTACHMENT

by

H. Tokel* and F. Sisto**

ABSTRACT

The dynamic stall of an airfoil with leading edge bubble separation is analyzed. The stall flutter of turbomachine blading often involves periodic growth and collapse of such a bubble. The mathematical model representing the physical problem is presented. A flat plate undergoing harmonic oscillations with time dependent point of re-attachment is studied for the perturbed aerodynamic reactions and applications to the stall flutter problem.



*Graduate Research Assistant and **Professor of Mechanical Engineering Stevens Institute of Technology

Nomenclature

a = acceleration

b = blade semichord

CT = lift coefficient

C_M = moment coefficient

F = Fourier transform

f,g= auxiliary functions

h = translational displacement

i = imaginary unit used in representation of the complex variables Z and ζ

Inidiayog molysyelsbos -

x,y = components along cartesian ecordanates

j = imaginary unit used in representation of the complex
form of simple harmonic function

k = reduced frequency

L = perturbation lift

M = perturbation moment

p = perturbation pressure

 $R_0 + j J_0 = complex function defined by Eq. (14)$

 $R_1 + j J_1 = complex function defined by (15)$

S(t) = point of reattachment

S1, S2 = upper and lower limits of reattachment

t = time

u = perturbation velocity in x-direction

v = perturbation velocity in y-direction

V = freestream velocity

 $W = \phi + i\Psi$, complex acceleration potential

x, y = cartesian coordinates in physical plane

z = x+iy point in physical plane

a = rotational displacement

 $\zeta = \xi + i\eta$ point in transformed plane

μ = dummy variable

 ξ , η = coordinates in transformed plane

p = density of the fluid

 $\sigma = \left| \frac{x}{2b} \right|$ a variable

x = phase difference

Subscripts:

x,y = components along cartesian coordinates in physical plane

inainittess fill

tos suxiliary functions

variables & and K

prometric rolledictor of a

temperates displacement = d

e Imaginary unit used to representation of the

R + j J = complex Tunction defined by Eq. (14)

R, + 1 J, = complex function defined by Eq. (15)

Superior and tower limits of realtachment

santy labianty at setulbroop extesting # y .x

could be not be determined at a s

onvig berrulanies at researchers a plane

oldelrev vases a u

when the n $\left|\frac{x}{x^2}\right| = 0$

nettanut atnomise signis to mich

ξ,η = components along cartesian coordinates in transformed plane

h = translational

a = rotational

Superscripts: good end to deliberate there at here they withinger w

' = dummy variable

- = amplitude

Introduction

An important type of phenomenon classified under the general heading of aeroelasticity of lifting surfaces is stall flutter. This is a type of dynamic instability that occurs when the flow separates around an airfoil through the whole or part of each cycle of its vibratory motion. This nonclassical type of flutter may involve periodic breakaway and reattachment of the flow and various types of time lag effects between the motion and the reactions. The stall flutter of helicopter rotors, aircraft wings, aircraft engine compressors at ground start up and high speed flight are examples giving rise to non-steady flow about an airfoil and a possible condition of destructive behavior. Thus the prediction of aerodynamic reactions in such flow situations is of considerable importance.

In many instances the flow separation from the suction surface of the airfoil does not involve a complete breakaway. Particularly with thin airfoils of small leading edge radius the separation point is "anchored" at the leading edge followed by a reattachment of the separation stream line at a point on the suction surface behind the leading edge. A "bubble" of separated flow is thus formed near the leading edge within which the velocities are quite low and the perturbation pressure near zero. The detailed fluid mechanical description of the flow is very complex, but the net effect on surface pressures is substantitally as described above. When the airfoils of a cascade are configured as in the compressor of a gas turbine it is thought that the channelling of the relative flow by adjacent airfoils inhibits the formation of separated regions extending to the trailing edges and promotes the leading edge bubble phenomenon.

In this paper an analytical method has been developed to predict the perturbed aerodynamic reactions of a flat plate airfoil with leading edge bubble of variable extent undergoing harmonic oscillatory motion. This technique with an empirical knowledge of the time history of the reattachment point can be used to predict stall flutter. Some numerical results and the computer plots of the dynamic loops are presented.

(4 NAN Cola Bos dea of the mx o

Physical Model

A two dimensional thin airfoil with small camber and incidence is considered. The flow is inviscid and incompressible. The problem is linear due to (i) small time dependent displacements (ii) small or zero mean angle of incidence and (iii) small perturbation velocities. Under these conditions a pressure function or acceleration potential $\phi = -\frac{1}{6}$ p exists.

As a model, a flat airfoil with zero thickness on the x-axis is taken. In Fig. 1 flow is parallel to the x-axis. The flow separates at the leading edge and reattaches at a point S on the suction surface. The time-dependent positions of re-attachment are shown by dotted lines. To veried every per the martinger and large

Boundary Conditions

1. The perturbation pressure is zero in the bubble. (φ= 0 in the cavity)

2.
$$\mathbf{v} = (\frac{\partial}{\partial t} + \mathbf{v} \frac{\partial}{\partial x}) \mathbf{y}$$
 $\mathbf{y} = 0^ 0 < x < 2b$

2.
$$\mathbf{v} = (\frac{\partial}{\partial t} + \mathbf{v} \frac{\partial}{\partial x}) \mathbf{y}$$
 $\mathbf{y} = 0^{-}$ $0 < \mathbf{x} < 2\mathbf{b}$
3. $\mathbf{a}_{\mathbf{y}} = (\frac{\partial}{\partial t} + \mathbf{v} \frac{\partial}{\partial x})^{2} \mathbf{y} = \frac{\partial \phi}{\partial \mathbf{y}}$ $\mathbf{y} = 0^{+}$ $\mathbf{S}(t) < \mathbf{x} < 1$

- 4. Complex acceleration potential ($W = \phi + i \Psi$) is continuous at the trailing edge (Kutta condition) and the separation point.
- 5. Complex acceleration potential vanishes at infinity (i.e. $W(z) \rightarrow 0$ as $z \rightarrow -\infty$). Satisfying the satisfying
- W(Z) is infinite at the leading edge. (Integrable singularity)
- 7. Harmonic Oscillations. a and to pullfaceado 21 (Displacements are given by $h = he^{jwt}$ and $\alpha = \alpha e^{jwt}$)

Mathematical Development

The flow, airfoil and the boundary conditions are transformed by the Conformal transformation $\zeta = \xi + i\eta = \int_{\frac{\pi}{2h}}^{\frac{\pi}{2h}}$. This reduces the difficulty in obtaining the solution of Laplace's Equation. Thus the Poincare boundary value problem is converted to the solution of a singular integral equation.

The prescribed value of $\frac{\partial \phi}{\partial n}$ on the ξ -axis is given by

$$\frac{\partial \phi}{\partial \eta} = 4b \xi \frac{\partial \phi}{\partial y}$$
 on $-1 < \xi < 0$ and $s(t) < \xi < +1$

where $s(t) = \sqrt{s(t)/(2b)}$

Fourier transformation is used to find the solution $\phi(r,\eta,t)$ of the Laplace Equation for the half plane problem which vanishes as $\eta \to + \infty$ and reduces to $\phi(\xi, 0^+, t)$ for $\eta = 0^+$.

Using Laplace's Equation and applying the Fourier transform wrt the variable \$ eds pates ba.+∞ at 7 notional etaputaco edr

$$\Phi(m,\eta,t) = \mathcal{T} \quad [\phi(\xi,\eta,t)] = \int_{-\infty}^{\infty} \phi(\xi,\eta,t) e^{-jm\xi} d\xi$$
(3)3 (3)4 (4.0.3)4

$$\frac{\partial^2 \phi(m,\eta,t)}{\partial \eta^2} = \mathcal{F} \left[\phi_{\eta\eta}(m,\eta,t) \right]$$

$$\mathcal{F} \left[\phi_{\xi\xi}(\xi,\eta,t) \right] = \int_{-\infty}^{+\infty} \phi_{\xi\xi}(\xi,\eta,t) e^{-jm\xi} d\xi$$

Using partial integration and the property of the

$$\mathcal{F} \left[\phi_{\xi\xi}(\xi,\eta,t) \right] = -m^2 \int_{-\infty}^{+\infty} \phi(\xi,\eta,t) e^{-jm\xi} d\xi$$

$$\frac{\partial^2 \phi(m,\eta,t)}{\partial \eta^2} - m^2 \phi(m,\eta,t) = 0$$

The solution of this equation is

$$\phi(m,\eta,t) = \phi(m,0,t)e^{-|m|}y$$

Using the boundary condition
$$\phi(m,\eta,t)=e^{-|m|\eta}\left[\int\limits_{-\infty}^{+\infty}\phi(\xi',0,t)e^{-jm\xi'}d\xi'\right]$$

and taking the inverse Fourier transform of Φ

$$\phi(\xi,\eta,t) = \mathcal{F}^{-1}[\phi(m,\eta,t)] = \frac{1}{2\pi} \int_{-\infty}^{+\infty} \phi(m,\eta,t) e^{jm\xi} dm$$

$$\Phi(\xi,\eta,t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} \Phi(\xi', 0,t) \left[\int_{-\infty}^{+\infty} e^{\left[jm(\xi'-\xi)-|m|\right]} dm \right] d\xi'$$

$$\phi(\xi,\eta,t) = \frac{1}{\pi} \int_{-\infty}^{+\infty} \phi(\xi,0,t) \frac{\eta}{\eta^2 + (\xi,-\xi)^2} d\xi'$$

This is Poisson's integral for a harmonic function.

The conjugate function Y is found using the Cauchy-Riemann equation.

$$-\Psi(\xi,\eta,t) = \frac{1}{\pi} \int_{-\infty}^{+\infty} \phi(\xi',0,t) \frac{\xi'-\xi}{\eta^2+(\xi'-\xi)^2} d\xi' - C(t)$$

Using the indentity

$$-\Psi(\xi, 0, t) = -\Psi(-1, 0, t) - \int_{-1}^{\xi} \frac{\partial \Psi}{\partial \xi'} d\xi'$$

and putting $\eta = 0^+$ in the previous equation results in

$$\frac{1}{\pi} \int_{-\infty}^{+\infty} \phi(\xi, 0, t) \frac{d\xi^{i}}{\xi' - \xi} - C(t) = -\Psi(-1, 0, t) - \int_{-1}^{\xi} \frac{\partial \Psi}{\partial \xi^{i}} d\xi^{i}$$

The range of integration of the infinite integral may be reduced as follows:

$$\frac{1}{\pi} \int_{-\infty}^{+\infty} \phi(\xi', 0, t) \frac{d\xi'}{\xi' - \xi} = F(\xi, t)$$

where

$$F(\xi,t) = \frac{1}{\pi} \int_{-1}^{0} \phi(\xi',0,t) \frac{d\xi'}{\xi'-\xi} + \frac{1}{\pi} \int_{-1}^{1} \phi(\xi',0,t) \frac{d\xi'}{\xi'-\xi}$$

This results from the assumption of zero perturbation pressure in the separation bubble and the inability of a single flat airfoil to exhibit a pressure perturbation in its wake (1).

The solution of this last integral equation for the two sections between $(-1 \rightarrow 0)$ and $(s(t) \rightarrow +1)$ which is bounded at the non-special

ends, and which satisfies the singularity condition at the leading edge and Kutta condition at the trailing is (4)

$$\phi(\xi,0,t) = -\frac{1}{\pi} \sqrt{\frac{1-\xi^2}{\xi(\xi-s(t))}} \begin{cases} \int_{-1}^{0} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^2}} F(\xi',t) \frac{d\xi'}{\xi'-\xi} \\ -1 & \end{cases}$$

$$+ \int_{s(t)}^{+1} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^2}} F(\xi';t) \frac{d\xi'}{\xi'-\xi}$$
(1)

Substituting Eq.(1) in the expression for $-\Psi(0,\eta,t)$ yields

$$-\Psi(1) = \frac{1}{\pi} \int_{-1}^{0} \frac{-1}{\pi} \sqrt{\frac{1-\xi''}{\xi''(\xi'-s(t))}} \left[\int_{-1}^{0} \sqrt{\frac{\mu(\mu-s(t))}{1-\mu^2}} F(\mu,t) \frac{d\mu}{\mu-\xi}, \right]$$

+
$$\int_{1-\mu^{2}}^{+1} \frac{\int_{1-\mu^{2}}^{\mu(\mu-s(t))} F(\mu,t) \frac{d\mu}{\mu-\xi'}}{\int_{1-\mu^{2}}^{+1} \frac{\xi'}{\eta^{2}+\xi'^{2}} .d\xi'} d\xi'$$

$$+ \frac{1}{\pi} \int_{s(t)}^{+1} \frac{-1}{\pi} \sqrt{\frac{1-\xi'}{\xi'(\xi'-s(t))}} \left[\int_{1-\mu^2}^{0} \sqrt{\frac{\mu(\mu-s(t))}{1-\mu^2}} F(\mu,t) \frac{d\mu}{\mu-\xi'} \right]$$

+
$$\int_{s(t)}^{+1} \sqrt{\frac{\mu(\mu-s(t))}{1-\mu^{2}}} F(\mu,t) \frac{d\mu}{\mu-\xi'} \left[\frac{\xi'}{\eta^{2}+\xi'^{2}} . d\xi' \right]$$

where the constant of integration C(t) has been put equal to zero since $-\Psi \rightarrow 0$ as $\eta \rightarrow \infty$.

$$F(\xi,t) = -\Psi(-1,0^{\dagger},t) + N(\xi,t)$$
 (2)

$$N(\xi) = -\int_{-1}^{\xi} \frac{\partial \psi}{\partial \xi'} d\xi' = \int_{-1}^{\xi} \frac{\partial \phi}{\partial \eta} d\xi'$$

Substituting this expression in Eq.(1) one obtains

$$\phi(\xi,0^{+},t) = \sqrt{\frac{1-\xi^{2}}{\xi(\xi-s(t))}} \left[F(0) + Q(\xi)\right]$$
where $F(0)+Q(\xi) = -\frac{1}{\pi} \left\{ \int_{-1}^{0} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^{2}}} \left[-\Psi(-1,0^{+},t)+N(\xi')\right] \frac{d\xi'}{\xi'-\xi} \right\}$

$$+ \int_{s(t)}^{t} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^{2}}} \left[-\Psi(-1,0^{+},t)+N(\xi') \right] \xi^{\frac{d\xi'}{1-\xi}}$$
 (3b)

Using Eq. (2)

$$-\Psi(-1,0^{+},t)+N(0)+Q(\xi)=\Psi(-1,0^{+},t) \cdot \frac{1}{\pi} \begin{bmatrix} \int \frac{\xi'(\xi'-s(t))}{1-\xi'^{2}} \frac{d\xi'}{\xi'-\xi} \\ -1 \end{bmatrix} + \int \int \frac{\xi'(\xi'-s(t))}{1-\xi'^{2}} \frac{d\xi'}{\xi'-\xi} - \frac{1}{\pi} \begin{bmatrix} \int \frac{\xi'(\xi'-s(t))}{1-\xi'^{2}} N(\xi') \frac{d\xi'}{\xi'-\xi} \\ -1 \end{bmatrix}$$
s(t)

$$+ \int_{1-\xi^{\prime}}^{\xi^{\prime}(\xi^{\prime}-s(t))} \sqrt{\frac{\xi^{\prime}(\xi^{\prime}-s(t))}{\xi^{\prime}-\xi}} N(\xi^{\prime}) \frac{d\xi^{\prime}}{\xi^{\prime}-\xi}$$

$$(4)$$

Using integration over the contour shown in Fig. 1

$$\int_{-1}^{0} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^{2}}} \frac{d\xi'}{\xi'-\xi} + \int_{s(t)}^{1-\xi'^{2}} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^{2}}} \frac{d\xi'}{\xi'-\xi} = -\pi$$

This result when put in Eq. (4) simplifies that expression to

$$Q(\xi) = -\frac{1}{\pi} \int_{1-\xi^{2}}^{0} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^{2}}} N(\xi') \frac{d\xi'}{\xi'-\xi} + \int_{1-\xi^{2}}^{+1} \sqrt{\frac{\xi'(\xi'-s(t))}{1-\xi'^{2}}} N(\xi') \frac{d\xi'}{\xi'-\xi}$$

$$= -1 \qquad s(t) \qquad (5)$$

Using Eq. (2) with $\xi=0$ and the above result yields

$$-\Psi(0,\eta,t) = \frac{1}{\pi} \int_{-1}^{0} \sqrt{\frac{1-\xi'^{2}}{\xi'(\xi'-s(t))}} \left[F(0) + Q(\xi') \right] \frac{\xi' d\xi'}{\eta^{2} + \xi'^{2}}$$

$$+ \frac{1}{\pi} \int_{\xi'(\xi'-s(t))}^{1-\xi'^2} \left[F(0) + Q(\xi') \right] \frac{\xi' d\xi'}{\eta^2 + \xi'^2}$$
(6)

Using the identity for $-\Psi(\xi, 0^{\dagger}, t)$, Eq.(2) and the expression for $N(\xi)$ reveals that

$$\widetilde{F}(\xi,t) = -\Psi(\xi,0^{\dagger},t) \tag{7}$$

Assuming harmonic time dependence, the Euler equation

$$\frac{\partial \mathbf{v}}{\partial \mathbf{t}} + \mathbf{v} \frac{\partial \mathbf{v}}{\partial \mathbf{x}} = - \frac{\partial \Psi}{\partial \mathbf{x}}$$

becomes

$$\frac{\partial \overline{v}}{\partial x} + \frac{j\omega}{v} = -\frac{1}{v} \frac{\partial \overline{v}}{\partial x}$$
 since $v = \overline{v} e^{j\omega t}$

Using the boundary condition $\bar{v}(-\infty)=0$, the above differential equation has a solution of the form

$$\bar{\mathbf{v}}(\mathbf{x},0) = -\frac{1}{\mathbf{v}} e^{\frac{\mathbf{j}\omega}{\mathbf{v}}} \mathbf{x} \int_{-\infty}^{\mathbf{x}} \frac{\partial \overline{\psi}(\mathbf{x},0)}{\mathbf{x}} e^{\frac{\mathbf{j}\omega}{\mathbf{v}}} \mathbf{x} d\mathbf{x}$$
(8)

where the path of integration is taken to lie entirely along the real axis. The above equation is integrated by parts to reduce the

order of the singularity in the integrand,

$$\overline{\mathbf{v}}(0^{+},0) = -\frac{1}{\overline{\mathbf{v}}} \left[-\overline{\mathbf{v}}(0^{+},0) + \frac{\mathbf{j}\omega}{\overline{\mathbf{v}}} \int_{-\infty}^{\infty} \overline{\mathbf{v}}(\mathbf{x},0) e^{\frac{\mathbf{j}\omega}{\overline{\mathbf{v}}}} \mathbf{x} \right] d\mathbf{x}$$
 (9)

The boundary condition is applied just back of the leading edge, $x=0^+$.

$$\lim_{\varepsilon \to 0} \int_{-\varepsilon}^{+\varepsilon} e^{\frac{j\omega x}{\overline{V}}} \qquad \overline{\Psi}(x,0) dx = \lim_{\varepsilon \to 0} \int_{-\varepsilon}^{0} (1 + \frac{j\omega x}{\overline{V}}) \left[\overline{\Psi}(0,\eta,t) \right] dx$$

+Lim
$$\int_{\varepsilon \to 0}^{\varepsilon} (1 + \frac{j\omega x}{V}) \left[\overline{\psi}(\xi, 0^+, t) \right]_{\xi = -\sqrt{\left|\frac{x}{2b}\right|}}^{\varepsilon}$$
 (10)

Expressing $F(\xi,t)$ as a generalized polynomial in ξ , using Eqs.(2), (5),(6) and performing the integration, it is found that

$$\lim_{\varepsilon \to 0} \int_{-\varepsilon}^{+\varepsilon} e^{\frac{j\omega}{V}x} = 0$$
 (11)

Thus, the upper limit in Eq.(9) may be changed to 0^- . Writing x = -|x|

$$\nabla \overline{v}(0^+,0) = -\overline{\psi}(0^+,0) + \frac{j\omega}{v} \int_0^{\infty} \overline{\psi}(x,0) e^{-j\frac{\omega}{v}|x|} dx$$

with

$$\sigma = \frac{|x|}{2b}$$
 and $k = \frac{\omega b}{V}$

$$\nabla v(0^+,0) = -\Psi(0^+,0) + j2k \int_0^{\infty} e^{-j2k} \Psi(x,0) d\sigma$$

Now, one has to change the coordinates of the function $\overline{\Psi}$. On the lower surface $x=0^+$, $y=0^-$ corresponds

to
$$\xi=0^-$$
, $\eta=0^+$ and $-\infty < x < 0^-$, $y=0$ corresponds to $\xi=0$, $0<\eta=\sqrt{\left|\frac{x}{2b}\right|}<\infty$. Thus, continuing the previous reduction

$$\nabla \overline{\nabla}(0^+,0) = - \overline{\Psi}(\xi,0^+,t) + j2k \int_{0}^{\infty} e^{-j2k\sigma} \left[\overline{\Psi}(0,\eta,t) \right] d\sigma$$

With reference to Equations (6) and (7), changing the dummy variable and substituting $\eta = \sigma$ reduces the previous equation to

$$V\overline{v}(0^{+},0) = \overline{F}(0^{-}) - \frac{j2k}{\pi} \int_{0}^{\infty} e^{-j2k\sigma} \left\{ \int_{-1}^{0} \sqrt{\frac{1-\xi^{2}}{\xi(\xi-s(t))}} \left[\overline{F}(0,t) + \overline{Q}(\xi) \right] \frac{\xi d\xi}{\sigma+\xi^{2}} \right\} d\sigma$$

$$- \frac{j2k}{\pi} \int_{0}^{\infty} e^{-j2k\sigma} \left\{ \int_{s(t)}^{1} \sqrt{\frac{1-\xi^{2}}{\xi(\xi-s(t))}} \left[\overline{F}(0,t) + \overline{Q}(\xi) \right] \frac{\xi d\xi}{\sigma+\xi^{2}} \right\} d\sigma$$

$$(12)$$

The above function can be expressed in terms of tabulated functions

$$\int_{0}^{\frac{e^{-j2k\sigma}}{\sigma+\xi^{2}}} d\sigma = g(2k\xi^{2}) - jf(2k\xi^{2})$$

where

$$f(Z) = \sin Z \text{ Ci}(Z) + \cos Z(-\text{Si}(Z))$$

$$g(Z) = \sin Z (-\text{Si}(Z)) - \cos Z \text{ Ci}(Z)$$

$$-\text{Si}(Z) = \frac{\pi}{2} - Z + \frac{Z^3}{3!3} - \frac{Z^5}{5!5} + \frac{Z^7}{7!7} - \cdots$$

$$\text{Ci}(Z) = 0.577216 - \cdots + 2nZ - \frac{Z^2}{2!2} + \frac{Z^4}{4!4} - \frac{Z^6}{6!6} + \cdots$$

Eq. (12) is solved by numerical quadratures yielding

$$\bar{F}(0,t) = \frac{V\bar{V}(0^+,0) + j2k(R_1 + jJ_1)}{1 - j2k(R_0 + jJ_0)}$$
(13)

where
$$R_{o}^{+jJ_{o}} = \frac{1}{\pi} \left\{ \int_{\xi}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} (g-jf) d\xi + \int_{\xi-s(t)}^{+1} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} (g-jf) d\xi \right\}$$

$$= -1$$

$$s(t)$$
(14)

and

$$R_{1}^{+jJ}_{1} = \frac{1}{\pi} \left\{ \int_{\xi} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} \tilde{Q}(\xi) (g-jf) d\xi + \int_{\xi-s(t)} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} \tilde{Q}(\xi) (g-jf) d\xi \right\}$$

$$= -1 \qquad s(t) \qquad (15)$$

Lift and Moment

Taking the lift to be positive down;

$$\bar{L} = -\int_{0}^{2b} \bar{p} dx - \int_{s(t)}^{2b} (-\bar{p}) dx$$

where the conformal transformation

$$x = 2b(\xi^2 - \eta^2)$$
, $\frac{dx}{d\xi} = 4b\xi$

is used to yield

$$\bar{\mathbf{L}} = -4\mathbf{b}\rho \left[\int_{-1}^{0} \bar{\phi}(\xi, 0) \, \xi \, d\xi + \int_{-1}^{+1} \bar{\phi}(\xi, 0) \, \xi \, d\xi \right]$$

Using
$$\phi(\xi, 0^+, t) = \sqrt{\frac{1-\xi^2}{\xi(\xi-s(t))}}$$
 [F(0)+Q(\xi)]

which was derived earlier in the analysis,

$$\tilde{L} = -4b\rho \left\{ \int_{\xi - s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi - s(t)}} \left[F(0,t) + \bar{Q}(\xi,t) \right] d\xi + \int_{\xi - s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi - s(t)}} \left[\bar{F}(0,t) + \bar{Q}(\xi,t) \right] d\xi \right\}$$
s(t)

(16)

Assuming positive stalling, the moment is given similarly by

$$\widetilde{M} = -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi + \int_{\overline{\xi}-s(t)}^{+1} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

$$= -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

$$= -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

$$= -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

$$= -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

$$= -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

$$= -8b^{2}\rho \left\{ \int_{\overline{\xi}-s(t)}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} [\overline{F}(0,t)+\overline{Q}(\xi,t)] \xi^{2} d\xi \right\}$$

Bending Motion

Here h=h ejwt is reckoned to be positive down.

The relevant equations derived earlier in the analysis yield successively

$$\bar{\mathbf{v}}(0^+) = -jkv \frac{\bar{h}}{b}$$

$$\frac{\partial \phi}{\partial \eta} = 4b^2 \omega^2 \quad \frac{\bar{h}}{b} \quad \xi$$

$$\bar{N}(\xi) = 2b^2 \omega^2 \quad \frac{\bar{h}}{b} \quad (\xi^2 - 1)$$
(18)

$$\bar{Q}(\xi) = \frac{2b^2 \omega^2 \bar{h}}{b} \left\{ \begin{array}{l} \frac{1}{\pi} \left[\int_{-1}^{0} \xi'(\xi' - s(t))(1 - \xi'^2) \frac{d\xi'}{\xi' - \xi} + \frac{d\xi'}{\xi' - \xi'} + \frac{d\xi'}{\xi' - \xi$$

+1
+
$$\int \int \xi'(\xi'-s(t))(1-\xi'^2) \frac{d\xi'}{\xi'-\xi} +1$$
s(t)

The above integrals are evaluated by contour integration (contours similar to Fig. 1). When the result is substituted in the previous equation it simplifies to

$$\bar{Q}(\xi) = \frac{2b^2 \omega^2 \, \bar{h}}{b} \left(\xi^2 - \frac{s(t)\xi}{2} - \frac{s^2(t)}{8} + \frac{1}{2} \right) \tag{19}$$

$$\bar{F}_{h}(0) = 2(A_{h} + jB_{h})b^{2}\omega^{2}\frac{\bar{h}}{b}$$
 (20)

where the subscript h denotes bending motion.

$$A_{h}^{+jB} = j \frac{1}{2} \frac{-\frac{1}{k} + 4k {(R_{2}^{+jJ}_{2})}}{1 - j2k {(R_{0}^{+jJ}_{0})}}$$
(21)

Ro+jJo is given by Eq. (14)

and

$$R_{2}+jJ_{2} = \frac{1}{\pi} \left\{ \int_{-1}^{0} \sqrt{\frac{\xi(1-\xi^{2})}{\xi-s(t)}} \left[-\frac{s(t)}{2} \frac{\xi}{\xi} - \frac{s^{2}(t)}{\xi} + \xi^{2} + \frac{1}{2} \right] (g-jf) d\xi \right\}$$

$$+ \int \sqrt{\frac{\xi(1-\xi^2)}{\xi-s(t)}} \left[-\frac{s(t)\xi}{2} - \frac{s^2(t)}{8} + \xi^2 + \frac{1}{2} \right] (g-jf) d\xi$$

$$s(t) \qquad (22)$$

Substituting the above results in Eq.(16), lift for bending motion is

$$\bar{L}_{h} = -4b\rho \left\{ \int_{\frac{\xi(1-\xi^{2})}{\xi-s(t)}}^{0} \cdot \left[2(A_{h} + jB_{h})b^{2} \frac{2\bar{h}}{b} + \frac{2b^{2}\omega^{2}\bar{h}}{b} \left[-\frac{s(t)\xi}{2} - \frac{s^{2}(t)}{8} + \xi^{2} + \frac{1}{2} \right] \right] d\xi$$

+1
+
$$\int \int \frac{\xi(1-\xi^2)}{\xi-s(t)} \left[2(A_h + jB_h)b^2 \omega^2 \frac{\bar{h}}{\bar{b}} \right]$$
s(t)

$$+\frac{2b^2w^2\bar{h}}{b}\left[-\frac{s(t)\cdot\xi}{2}-\frac{s^2(t)}{8}+\xi^2+\frac{1}{2}\right]d\xi$$
 (23)

Moment for bending motion is

$$\bar{M}_{h} = -8b^{2}\rho \left\{ \int_{\xi - s(t)}^{\xi (1-\xi^{2})} \left[2(A_{h} + jB_{h})b^{2}\omega^{2}\frac{\bar{h}}{b} + 2b^{2}\omega^{2}\frac{\bar{h}}{b} \right] -1 \right\}$$

$$\left[-\frac{s(t)}{2} - \frac{s^2(t)}{8} + \xi^2 + \frac{1}{2}\right] \xi^2 d\xi$$

$$+ \int \int \frac{\xi(1-\xi^{2})}{\xi-s(t)} \left[2(A_{h}+jB_{h})b^{2}\omega^{2}\frac{\bar{h}}{b} + 2b^{2}\omega^{2}\frac{\bar{h}}{b} \right]$$
s(t)

$$\left[-\frac{s(t) \cdot \xi}{2} - \frac{s^2(t)}{8} + \xi^2 + \frac{1}{2}\right] \xi^2 d\xi$$
 (24)

Torsional Motion

For torsion about the leading edge, the displacement for $\alpha = \bar{\alpha} e^{jwt}$ positive stalling, is expressed as

$$y = -\bar{\alpha} x e^{jwt}$$
 has (al) are oral (3.0)4 has (4.3)6

Analogously to the bending motion case, the expressions are given successively

$$\bar{\mathbf{v}}(\mathbf{o}^{\dagger}) = -\mathbf{v}\bar{\mathbf{a}}$$
 (25)

$$\frac{\partial \overline{\phi}}{\partial n} = \left[-j \frac{8}{k} b^2 \omega^2 \xi + 8b^2 \omega^2 \xi^3 \right] \quad \overline{\alpha}$$
 (26)

$$\bar{N}(\xi) = [-j \frac{4}{k} b^2 \omega^2 (\xi^2 - 1) + 2b^2 \omega^2 (\xi^4 - 1)] \bar{\alpha}$$
 (27)

$$\bar{Q}(\xi,t) = -\frac{1}{\pi} \left\{ -(-j\frac{4}{k}b^2\omega^2)\bar{\alpha} \left[\int_{-1}^{0} \sqrt{\xi'(\xi'-s(t))(1-\xi'^2)} \frac{d\xi'}{\xi'-\xi} \right] \right\}$$

$$\int_{s(t)}^{+1} \sqrt{\xi'(\xi'-s(t))(1-\xi'^2)} \frac{d\xi'}{\xi'-\xi} \right] -2b^2 \omega^2 \alpha \left[\int_{-1}^{0} \sqrt{\xi'(\xi'(\xi'-s(t))(1-\xi'^2)(1+\xi'^2)} \frac{d\xi'}{\xi'-\xi} \right]$$

$$\int_{s(t)}^{+1} \sqrt{\xi'(\xi'-s(t))(1-\xi'^2)} (1+\xi'^2) \frac{d\xi'}{\xi'-\xi} \right] -j' \frac{4}{k} b^2 \omega^2 \bar{\alpha} + 2b^2 \omega^2 \bar{\alpha}$$

The above integrals are solved by similar elaborate contour integrations. Substituting the results and after some algebra.

$$\widetilde{Q}(\xi,t) = b^{2} \omega^{2} \widetilde{\alpha} \left\{ -j \frac{4}{K} \left[\xi^{2} - \frac{s(t)}{2} \frac{\xi}{2} - \frac{s^{2}(t)}{8} + \frac{1}{2} \right] + 2 \right\}$$

$$\left[\xi^{4} - \frac{s(t) - \xi^{3}}{2} + \left(\frac{1}{2} - \frac{s^{2}(t)}{8} \right) \xi^{2} + \left(\frac{-s(t)}{4} - \frac{s^{3}(t)}{16} \right) \xi - \frac{5 - s^{4}(t)}{128} - \frac{s^{2}(t)}{16} + \frac{3}{8} \right] \right\} (28)$$

 $\bar{F}(0,t)$ for torsional Motion is obtained by substituting Eqs.(25), (14), (15) and (28) into Eq. (13).

and locously to the bending antion case, the

BUL WE TO VE

Analogously to the bending motion, the lift and the moment for torsional motion are obtained by substituting the above values of $\bar{Q}(\xi,t)$ and $\bar{F}(0,t)$ into Eqs. (16) and (17) respectively.

Special Cases:

(i) Attached Flow:

For Attached Flow s(t) = 0.

Using this value in Eq. (1)

$$\phi(\xi,0^{+},t) = -\frac{1}{\pi} \quad \frac{\sqrt{1-\xi^{2}}}{\xi} \quad \int_{-1}^{+1} \frac{\xi'}{\sqrt{1-\xi'^{2}}} F(\xi') \frac{d\xi'}{\xi'-\xi}$$

The above result satisfies the singularity condition at the leading edge (ξ =0), and the Kutta condition at the trailing edge(ξ = \pm 1).

Fig. (19) with s(t) = gives sales as a sales and collections

$$\bar{Q}(\xi) = \frac{2 b^2 \omega^2 \bar{h}}{b} (\xi^2 + \frac{1}{2})$$

(ii) Stalled Airfoil: ods fusksillads speaker and hart has end

For an oscillating airfoil with complete separation on the suction surface s(t) = 1.

For this value Eq. (1) simplifies to

$$\phi(\xi,0^{+},t) = -\frac{1}{\pi} \sqrt{\frac{1+\xi}{-\xi}} \int_{-1}^{0} \sqrt{\frac{-\xi'}{1+\xi'}} F(\xi',t) \frac{d\xi'}{\xi'-\xi}$$

This satisfies the singularity and Kutta conditions at the leading and trailing edges respectively.

For full separation, Eq. (19) of bending motion becomes

$$\bar{Q}(\xi) = \frac{2b^2 \omega^2 \bar{h}}{b} (\xi^2 - \frac{1}{2} \xi + \frac{3}{8})$$

and Eq.(28) of torsional motion simplifies to

$$\bar{Q}(\xi) = b^2 \omega^2 \bar{\alpha} \left[-j \frac{4}{k} (\xi^2 - \frac{1}{2} \xi + \frac{3}{8}) + 2(\xi^4 - \frac{1}{2} \xi^3 + \frac{3}{8} \xi^2 - \frac{5}{16} \xi + \frac{35}{128} \right]$$

Similarly the lift and the moment for these special cases are obtained by substituting the relevant expressions derived above into Eqs.(16) and (17).

prihavank audalias in nedmon s on abmonda rates with it not satisfy

expression for the vesteschasse soint. This exitations in specifying

Stability Analysis

This analysis is aimed at predicting the perturbed aerodynamic characteristics of a flat plate airfoil with leading edge bubble separation. The motion is a harmonic bending and/or torsional oscillation in an otherwise undisturbed uniform field. The flow separates at the leading edge and reattaches at a point which is moving periodically with time between two limits on the suction surface.

One can find the moment coefficient about any axis using the following expression.

$$c_{M_{\alpha x}} = -(\frac{x}{2b}) c_{M_{h0}} + c_{M_{\alpha 0}} + (\frac{x}{2b})^2 c_{L_h} - (\frac{x}{2b}) c_{L_h}$$

where C_M = moment coefficient about any point x along
the chord due to torsional oscillation about
this point.

C_M = moment coefficient about the leading edge due
to bending oscillation.

c_M == moment coefficient about the leading edge due
 to torsional oscillation about the leading edge.

C_L = lift coefficient due to bending oscillation.

C_L = lift coefficient due to torsional oscillation about the leading edge.

In the above analysis, the point of reattachment is assumed to be given by

$$s(t) = \frac{1}{2} [S_1 + S_2) + (S_1 - S_2) \cos(\omega t - \chi)]$$

The only obstacle to applying the method is the definition of the exact time dependency of the point of reattachment. The present technique is semiempirical in the sense that it uses the above expression for the reattachment point. This empiricism in specifying the expression can be improved using flow visualization techniques and high speed photography or detailed boundary layer analysis. The variation of this point depends on a number of variables including the reduced frequency of motion, the airfoil geometry, the nature of the flow pattern. If this history is analyzed for different reduced frequencies from experimental data, more suitable empirical functions can be obtained.

Given this time dependent movement of the point, the present technique can indicate the occurrence or absence of stall flutter for any configuration. The sign of the value of work done per cycle, positive, zero or negative, will indicate this information about stall flutter.

The work done for pure bending motion is represented by

$$W \sim \int_0^{2\pi} c_{L_h} \cdot \frac{dh}{dt} \cdot d(\omega t)$$
where
$$c_{L_h} = c_{L_0} + c_{L_1} \cos(\omega t + \phi_1) + \dots$$
and
$$h = h_0 \cos \omega t$$

Taking the integral

W
$$\sim$$
 - $\frac{1}{2}$ π C_{L_1} . $\sin\phi_1$

Some numerical values are presented in Table 2 as examples for the coefficients and phase angles of the "Lift Coefficient" term

Similarly for pure torsional motion

$$W \sim \int_{0}^{2\pi} c_{M} \cdot \frac{d}{dt} \cdot d(\omega t)$$

Numerical Results

A computer program has been developed to calculate the lift and moment coefficients by numerical integration using the expressions presented above. The program calculates the coefficients at a certain number of points for each cycle of oscillation. It uses harmonic analysis, and finds the coefficients of Fourier series which represents the lift and the moment coefficients. The work coefficient

for bending oscillation is represented by one of these Fourier constants, the coefficient of the first "sine" term. The Fourier series is then employed to plot the graphs of the lift and the moment coefficient loops. The graphs presented in this paper are directly obtained using this computer program and the plotter output.

Results and Conclusions

The effect on the lift and moment of a single nonstationary airfoil with a leading edge bubble of variable extent described in this paper. To verify that the developed mathematical model is applicable, fully separated (supercavitated) flow, which is a special case of the general method presented above, is studied for this purpose. It is found that the general expressions derived for lift and moment coefficients simplify exactly to the results obtained by previous investigators (2) for supercavitating airfoils. The numerical results are also, in good agreement with the results obtained earlier as shown in Table 1.

An initial set of numerical and graphical results have been obtained for pure bending (plunging) oscillations of the airfoil.

Although the discussion is based on these necessarily preliminary data, many of the physical conclusions carry over to expected results to be obtained in the future for pure torsional oscillations.

The location of the bubble that forms on the airfoil governs the airfoil stall characteristic. Aerodynamic reactions vary in a periodic but non-sinusoidal manner for an airfoil oscillating harmonically. The hysteresis increases as the travel range of the reattachment point gets wider. It is believed that the numerical results deviate somewhat from the mathematically exact solution if the reattachment point approaches the immediate neighborhood of the

leading edge singularity. The amplitudes of lift and moment due to oscillation become smaller as the point of reattachment moves closer to the trailing edge. This is attributable to the reduction of the perturbation pressure, and hence the contribution to unsteady lift and moment, of a larger portion of the suction surface including the leading edge.

Damping derivatives (imaginary part of lift, C_{Lh}, and moment C_{Mq}, coefficients) attain larger magnitudes with increasing reduced frequencies. These higher reduced frequencies produce higher amplitudes for unsteady aerodynamic reactions in general, see Figs. 6,7,8 and Figs. 9 and 10.

The present analysis supplies the necesary information required to determine the aerodynamic work including its sign. The work can be analytically obtained by the cyclic integrals $\oint L dh$ for bending motion and $\oint M d\alpha$ for torsional motion. From the type of data shown in Table 2 this work can be calculated and is found to depend on C_{L1} and ϕ_1 . Aerodynamic work per cycle may also be interpreted as the area of the closed figures in the L, h plane or the M, α plane. Work done per cycle depends on reduced frequency and phase lag of bubble movement as can be inferred by comparing Figs. 3 to 6 for phasing effect and Figs. 6 to 8 for frequency effect.

Fig. 11 is an example for a fixed point of reattachment showing the expected elliptical lift loop. The hysteresis effects due to bubble movement are emphasized in Figs. 7 and 9 and in Figs. 8,10, and 12 in which the reattachment point moves during the cycle of oscillation for each series. Crossing of the lift and moment loops has been reported by previous investigators as a possible effect of stalling. See Figs. 3, 4, 5 and 13, the last being one example of a moment loop.

It can be concluded that the integral formulation of the mathematical model as presented here is a good representation of the leading edge bubble for the cases discussed above.

With a better understanding of the time history of the reattachment point and perhaps using a time dependent phase lag, the present technique can be studied further and using a suitable mapping function can be applied for cascades of airfoils. An important next step is the execution of a numerical and graphical study of the case of torsional motion.

Acknowledgement

This work was supported by the Office of Naval Research contract N00014-76-C-0540 with James R. Patton, Jr., as a program manager.

References

- 1. Dowell, E.H. and Ventres, C.S., "Derivation of Aerodynamic Kernel Functions", AIAA Journal, v.ll, n.ll, November 1973.
- F. Sisto "The Derivation of Aerodynamic Coefficients of a Fully Stalled Oscillating Airfoil by the method of Acceleration Potential" (unpublished)
- 3. Perumal, P.V.K. "The Perturbed Aerodynamic Characteristics of an Oscillating Airfoil with Time Dependent Point of Separation by the Method of Acceleration Potential", M.E. Thesis, Stevens Institute of Technology, 1972.
- 4. Muskhelishvili, N.I., "Singular Integral Equations", P. Noordhof, Groningen, Holland, 1953.
- 5. Martin, M., "Unsteady Lift and Moment on Fully Cavitating Hydrofoils at Zero Cavitation Number" Journal of Ship Research, June 1962.
- Woods, L.C., "Aerodynamic Forces on an Oscillating Aerofoil Fitted with a Spoiler", Proc. Roy. Soc. London, Series A, No. 239, 1957, pp. 328-337.
- Sisto, F., "Linearized Theory of Nonstationary Cascades at Fully Stalled or Supercavitated Conditions", ZAMM 47, Heft 8, 1967, pp. 531-542.
- 8. Gakhov, F.D. "Boundary Value Problems". Translated by I.N. Sneddon, International Series of Monographs in Pure and Applied Mathematics, Pergamon Press, 1966.
- Mikhlin, S.G., "Integral Equations and their applications to problems in Mechanics etc." Translated by A.H. Armstrong. Pergamon Press 1957.
- 10. Abramowitz and Stegun, "Handbook of Mathematical Functions" Dover Publications, 1964.

Table 1

Fixed Separation Point in Translational Oscillation

(Fully Separated Case)

Reduced	frequency	Imaginary Lift Coef	y Part of fficient	Imaginary Part of Moment Coefficient	
		Present	L.C.Woods (6)	Present	L.C.Woods (6)
	.04	.061	.062	.019	.019
	.64	.949	.965	.292	.302

Table 2

Translational (Bending) Oscillation

h=h_O coswt

 $C_{L} = C_{L0} + C_{L1} \cos (\omega t + \phi_{1}) + C_{L2} \cos (\omega t + \phi_{2}) + \dots$

<u>s</u> 1	<u>s</u> 2	<u>k</u>	×	c _{ro}	C ^{L1}	ϕ_1	C _{L2/C_{L1}}
1/3	1/9	0.05	-∏/2	-0.01183	0.23960	-88.5	0.04967
1/3	1/9	0.05	-∏/3	0.00986	0.23949	-88.4	0.04938
1/3	1/9	0.1	-∏/2	0.02480	0.46954	88.7	0.05385
1/3	1/9	0.2	-II/2	-0.05422	0.84945	82.7	0.06574
1/3	1/9	0.5	-∏/2	-0.10274	1.29881	83.6	0.08603
2/9	1/9	0.05	-∏/2	-0.00581	0.25164	-88.3	0.023268
2/9	1/9	0.1	-II/2	-0.01222	0.49446	89.3	0.02559
2/9	1/9	0.2	-II/2	-0.02801	0.9009	84	0.0323
2/9	1/9	0.5	0	0.16037	1.38703	85.6	0.04256

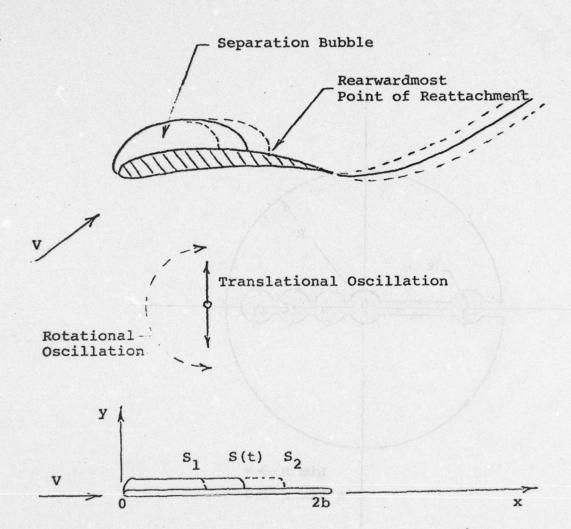


Fig. 1 - Physical model and corresponding mathematical model.

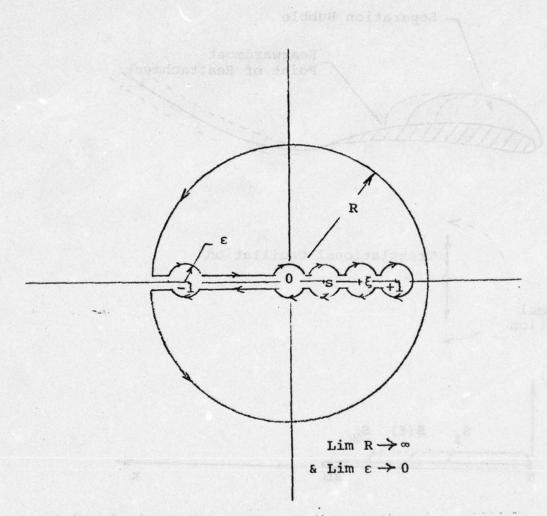


Fig. 2 - Countour for integration of Eq. (4).

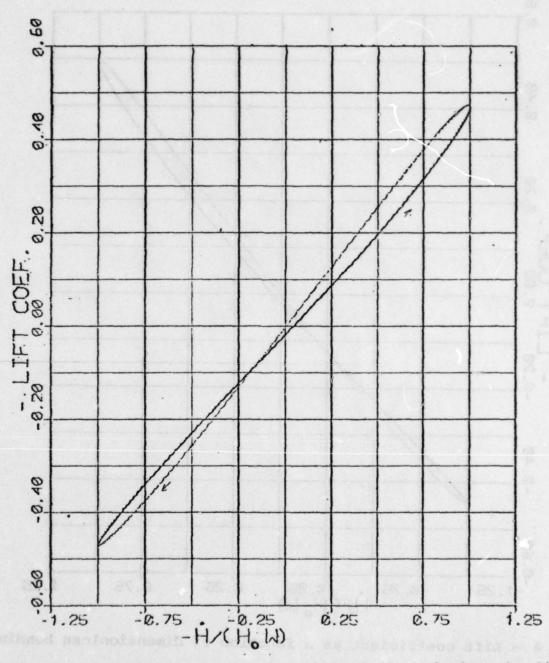


Fig. 3 - Lift coefficient as a function of dimensionless bending velocity at x = 0.

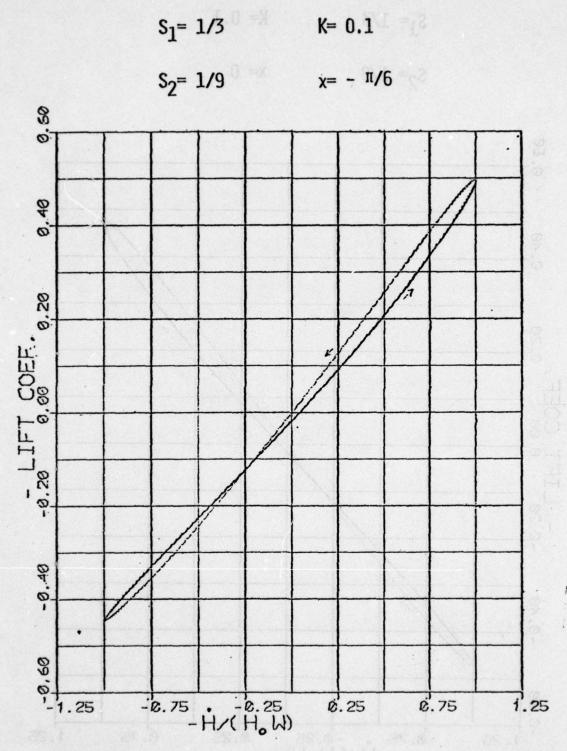


Fig. 4 - Lift coefficient as a function of dimensionless bending velocity at $x = \pi/6$.

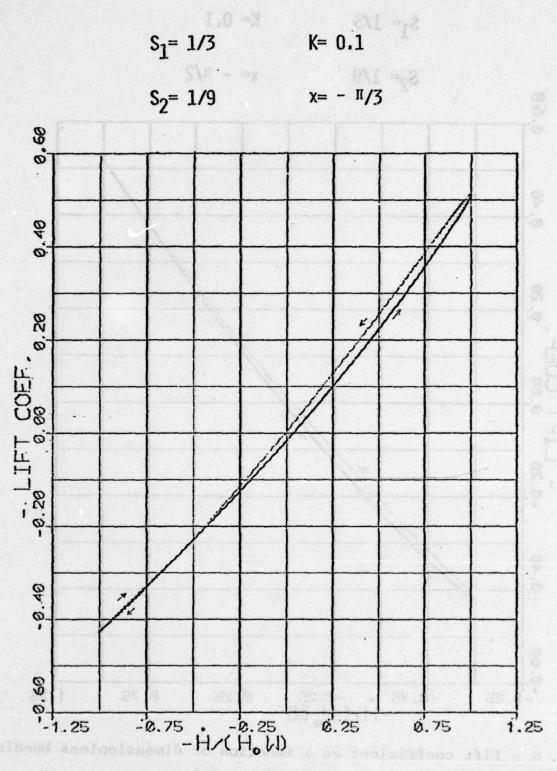


Fig. 5 - Lift coefficient as a function of dimensionless bending velocity at $x = \pi/3$.

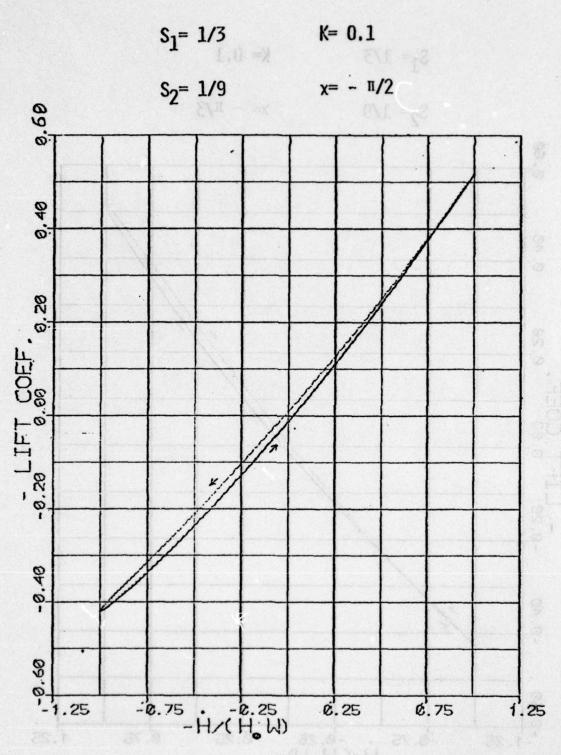


Fig. 6 - Lift coefficient as a function of dimensionless bending velocity at $x = -\pi/2$ and k = 0.1


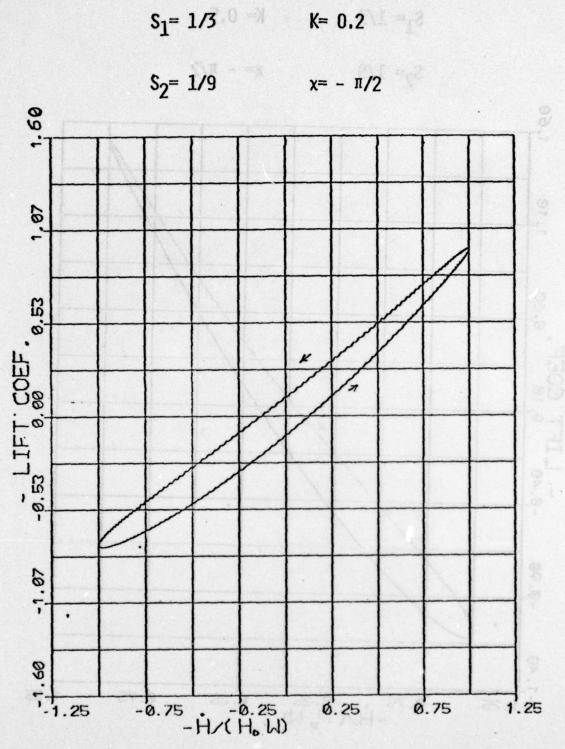


Fig. 7 - Lift coefficient as a function of dimensionless bending velocity at $x = -\pi/2$ and k = 0.2

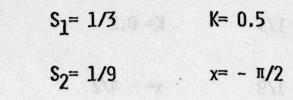

1

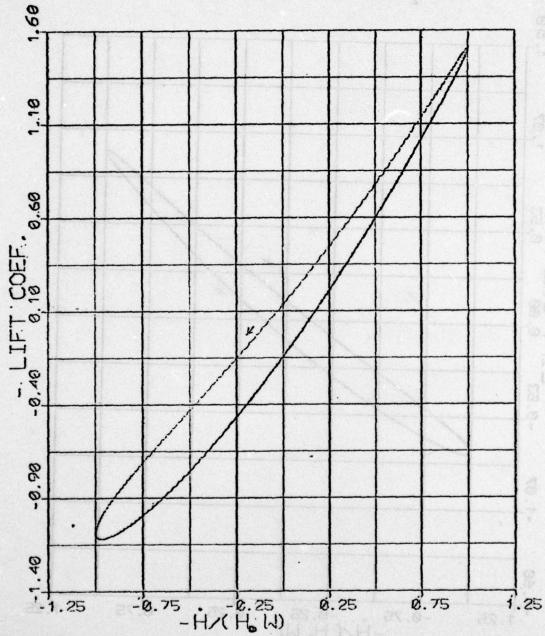


Fig. 8 - Lift coefficient as a function of dimensionless bending velocity at $x = -\pi/2$ and k = 0.5

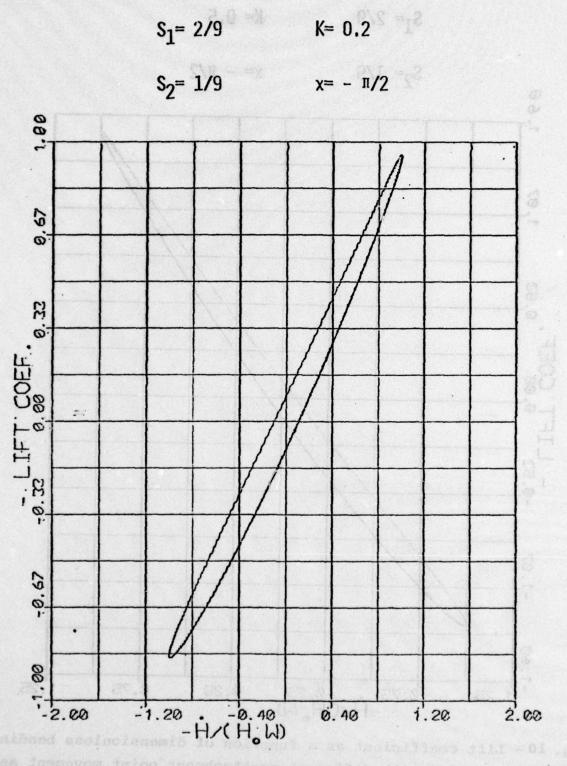


Fig. 9 - Lift coefficient as a function of dimensionless bending velocity with different reattachment point movement as compared to figure 7.

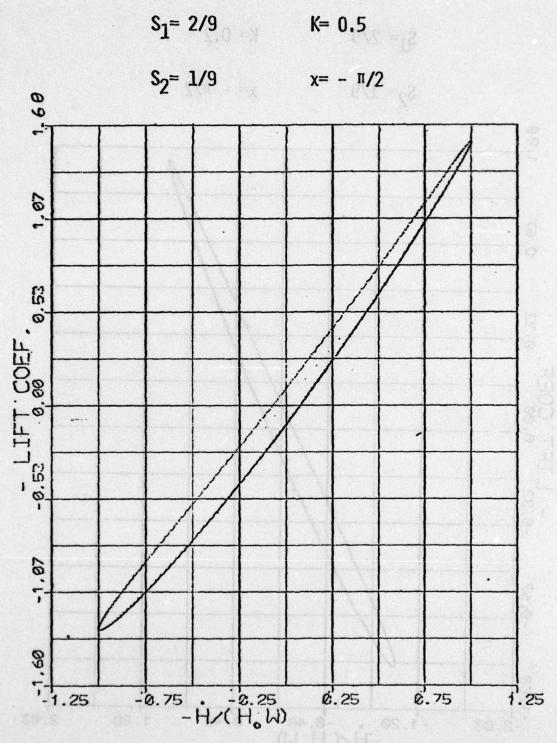


Fig. 10 - Lift coefficient as a function of dimensionless bending velocity with different reattachment point movement as compared to figure 8.

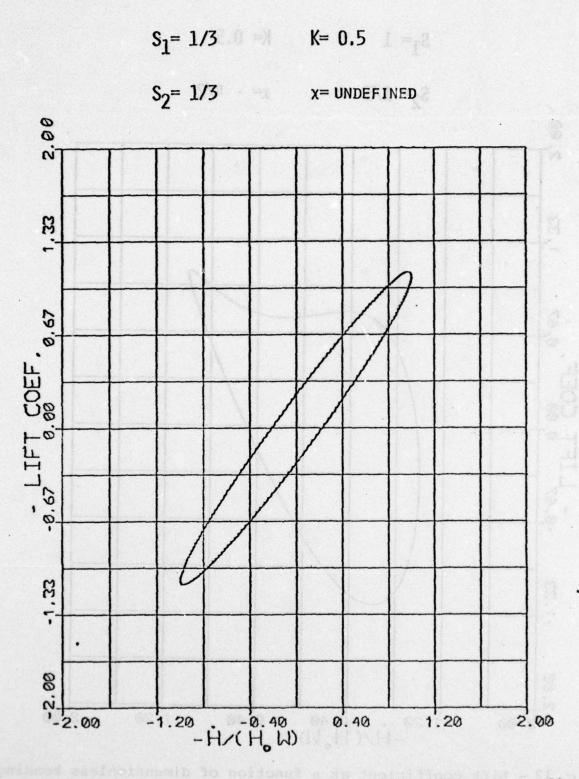


Fig. 11 - Lift coefficient as a function of dimensionless bending velocity with fixed reattachment point.


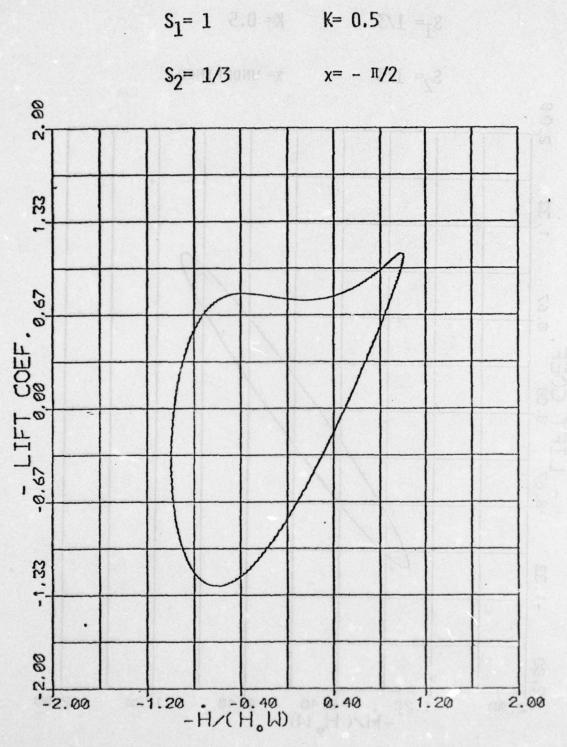


Fig. 12 - Lift coefficient as a function of dimensionless bending velocity with different reattachment point movement as compared to figures 8,10 and 11.

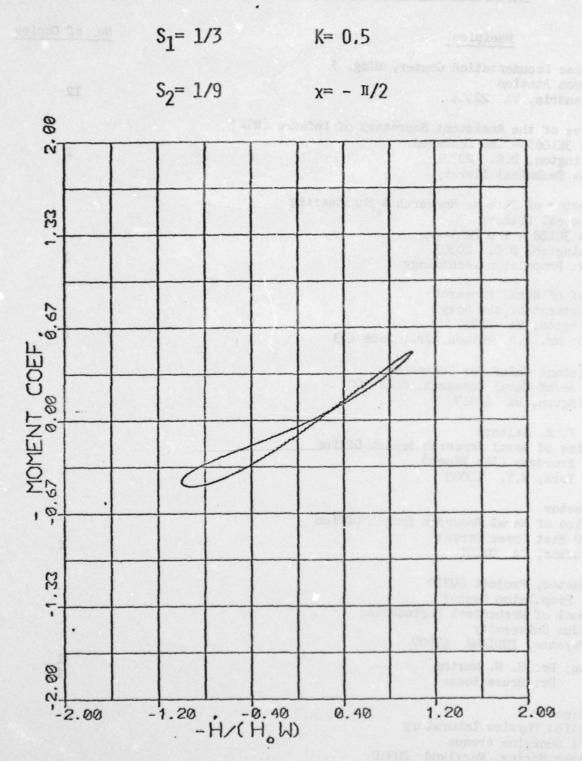

11

Fig. 13 - Example of moment coefficient loop for data of figure 8.

TECHNICAL REPORT DISTRIBUTION LIST

STEVENS INSTITUTE OF TECHNOLOGY CONTRACT NOOO14-76-C-0549 - NR 094-363

Recipient		No. of Copies
Defense Documentation Center, Bldg. 5 Cameron Station Alexandria, VA 22314		12
Office of the Assistant Secretary of De Room 3E1065 - The Pentagon	fense (R&D)	100
Washington, D.C. 20301 Attn: Technical Library		1
Director of Defense Research & Engineer Technical Library Room 3C128 - The Pentagon	ing	
Washington, D.C. 20301 Attn: Propulsion Technology		1
Chief of Naval Research Department of the Navy Arlington, VA 22217		
Attn: Mr. J.R. Patton, Jr., Code 473		2 00
Assistant Chief for Technology Office of Naval Research, Code 200 Arlington, VA 22217		1,8
Mr. F. E. Walters Office of Naval Research Branch Office 715 Broadway (5th Floor)	RAL.	
New York, N.Y. 10003		1 2
Director Office of Naval Research Branch Office 1030 East Green Street Pasadena, CA 91101		1
Director, Project SQUID Jet Propulsion Center School of Mechanical Engineering Purdue University Lafayette, INDIANA 47907		
Attn: Dr. S. N. Murthy Dr. Bruce Reese		1
Director Applied Physics Laboratory 8621 Georgina Avenue Silver Spring, Maryland 20910 Attn: Library	EN S SS.I.	00.5-

Dr. Larry D. Mitchell Associate Professor Department of Mechanical Engineering Virginia Polytechnic Institute and State University Randolph Hall Blacksburg, VA 24061	E. March Mangons Inhorateur shipers, VA 22448 the: Packateal IIIbrary trai Enly account pad Datelopaus Center amporta Davision marchie Davision this iddress, Code A224
Commander Naval Air Systems Command Department of the Navy' Washington, D.C. 20361 Attn: Mr. R.R. Brown, AIR 330 Dr. H. Rosenwasser, Code 310C Technical Library Div., Code 604	events of real? Takes universite singlebath Sittl wil singlebath 'The shot into
Commander Naval Ship Systems Command Dept. of the Navy Washington, D.C. 20360 Attn: Mr. R.R. Peterson, Code 03413 Mr. C. Miller, Code 6146 Technical Library	could execute an unit of the second state of t
Commander Naval Ordnance Systems Command Dept. of the Navy Washington, D.C. 20360 Attn: Mr. B. Drimmer, Code 033	a Cliff of Appropriate 1 and Level 1.5.
Commander U.S. Naval Ordnance Laboratory White Oak Silver Spring, MD 20910 Attn: Library	Color barrand to be seen to be se
Commander Naval Weapons Center China Lake, CA 93555 Attn: Technical Library	Assisted Lunca Telegraph was Tackmen in Tackmen in Tack I line of the
Bureau of Naval Personnel Department of the Navy Washington, D.C. 20370 Director Ordnance Research Laboratory	de Morae destana Command Accor All VIII - Have Liver All Mo 2019
Pennsylvania State University University Park, PA 16802 Headquarters Naval Material Command Special Projects Office	To Force Office of Colemnific Semicology ADO Wilson, VA REACH POST AV. Semi J. F. Semi
Washington D.C. 20360 Attn: Technical Library	1

U.S. Naval Weapons Laboratory Dahlgren, VA 22448 Attn: Technical Library	1
Naval Ship Research and Development Center Annapolis Division Annapolis, MD 21402 Attn: Library, Code A214	1
Officer in Charge Naval Ship Engineering Center Philadelphia Division Philadelphia, PA 19112 Attn: Code 6700 Technical Library	1
Superintendent U.S. Naval Postgraduate School Monterey, CA 93940 Attn: Library, Code 0212	1
Director U.S. Naval Research Laboratory 4555 Overlook Ave., S.W. Washington, D.C. 20390 Attn: Technical Information Div. Library, Code 2029 (ONRL)	6
U.S. Naval Oceanographic Office Suitland, Maryland 20390 Attn: Library, Code 1640	1
Naval Missile Center Point Mugu, CA 93041 Attn: Technical Library, Code 5632.2	1
Navy Underwater Sound Laboratory Fort Trumbull New London, CONN 06320 Attn: Technical Library	10000 10000
Commander Air Force Systems Command Andrews Air Force Base Silver Hill, MD 20331	1
Commander Air Force Office of Scientific Research 1400 Wilson Blvd. Arlington, VA 22209	
Attn: J. F. Masi	1

Commander	
Wright Air Development Center	
Wright-Patterson Air Force Base, Ohio 45433	by III above the 2. Teb
Attn: AFAPL/RJ	1 askent y
2	
Commander	
Air Force Aero Propulsion Laboratory, TBP Wright-Patterson Air Force Base	THE CHARAST TO CARRIE VARVEY
Dayton, Ohio 45433	Caros Cula grandend ta
bay toll, ollio 4747)	
Commander	
Air Force Rocket Propulsion Laboratory	
Edwards Air Force Base, CA 93523	
Attn: WCLPS-1	ACCEL AG 2 tropposition
Chief of Research and Development	
Headquarters, Dept. of the Army	
Washington, D.C. 20310 Attn: Dr. S.J. Magram	Commenced, B. F. 10305
Physical & Engr. Div.	1
Hybrodi w Engl. Div.	a7 clyroatt instea
Army Missile Command	
Research and Development Directorate	
Redstone Arsenal, ALA 35809	
Attn: Propulsion Laboratory	emerel ille († 10 Co. Include des contactions
Commanding Officer	
U.S. Army Research Office Box CM, Duke Station	
Durham, No. Carolina 27706	
Attn: ORDOR-PC	
Avoir Oldott-10	midutoget large large
Director	
National Aeronautics & Space Administration	
Headquarters	
Washington, D.C. 20546	
Attn: Division Research Information	10150 1 A strait on
National Aeronautics & Space Administration	
Lewis Research Center 21000 Brookpark Rd.	
Cleveland, Ohio 44135	2 7045 407.53
7412	war Pales Bearen, Fich 73202
Dr. R. H. Kemp	
NASA-Lewis Research Center	
MS 49-3	
21000 Brookpark Rd.	Rillia Man in Manual one
Cleveland, Ohio 44135	needing land out
A	
Aerojet-General Corp. P.O. Box 296	
Azusa, CA 91702	
Attn: Librarian	Andreased to 1 date to the section

AiResearch Manufacturing Co. 9851 Sepulveda Blvd. Ios Angeles, CA 90045 Attn: Chief Engineer	repair (All Sewelopment Content (All Asket) (All Asket
Director National Bureau of Standards Gaithersburg, MD 20760	emineben e Paper Amer Prophision Laboratury, (Br instrictorium Ain Rires Ruse yton, ello 1 13433
AVCO Corporation Lycoming Spencer Division 652 Oliver St. Williamsport, PA 17701	commence of the second of the
General Electric Co. Engineering Dept. Turbine Div. Schenectady, N.Y. 12305	from Colored five described to tell word and to line . Constantial word for . Colored
General Electric Co. Aircraft Turbine Department West Lynn, MASS 01905 General Electric Co.	ligatical a ingen, 18v. Miguil en Transant Sector en i I evelopsent Directorate. Sectors browned, 11A 35800 to: Feroniation laboratory
Aircraft Gas Turbine Div. Cincinnati, Ohio 45215 Attn: Manager of Engineering	en Prio Sale 1 and grand a
Allison Division General Motors Corporation Detroit Diesel Indianapolis, Indiana 46206 Attn: Director of Engineering	a da, bara Alestana rben, iko. Perbitana 2770A tan delibin-Perbitana rotoral san Penting a Space Angling a Space
Solar Aircraft Co. San Diego, CA 92101 Attn: Chief Engineer	adguarters emiretos, 1,0, 1,0,0 des 12 veites Ausopren la Corectos 1
United Technologies Corp. Pratt & Whitney Aircraft Group P.O.Box 2691 West Palm Beach, FLA 33402	Alumal Acronautina a Sonce Administration at a single at the second of the sonapara at the second of
United Technologies Corp. Pratt & Whitney Aircraft Group East Hartford, CONN 06118	
Attn: Chief Engineer United Technologies Corp. Research Center East Hartford, Conn. 06118	respect, of o dalls relative-Campral Garge Ave ave ave or or ver
Attn: Director of Research	1 and 1 and

Varo, Incorporated 402 E. Gutierrez Street Santa Barbara, CA 93101 Attn: K. J. Widiner

FROMER OF TATAS STABLES ASSET A LOW MORESON TWO

policis 1 diam

Westinghouse Electric Corp. Steam Turbine Division Lester Branch Philadelphia, PA.

Lilsh, Lator

AVCO Lycoming Div. 550 So. Main St. Stratford, CONN 06497 Attn: Division Library

Action 1 . J. 20030

N. M. Y. 10011 Thospey water a recomment and

evorage need ean insole bedimiling at nother;

CONTROL MANY CONNECTED AS AS ABOUT AS ASSOCIATED DESCRIPTION AND TO TAKE THE PROPERTY OF THE PARTY OF THE PAR

Casteller Constational Flate Dympaigs

The dynamic are in the selection with leading edge bubble separa-

ex maldere lasterric our tour decreases tooks to transfer our transfer

erroli line ed ca proiscollera a accidant elactrica de che estate el intereda

THE PART SHAPE THE ROOM NOT THE TANK OF THE PART OF TH

SECURITY CLASSIFICATION OF THIS PAGE (When Date Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
I. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Research on the Flutter of Axial Turbomachine Blading		5. TYPE OF REPORT & PERIOD COVERED Technical Report November 1977
		6. PERFORMING ORG. REPORT NUMBER ME-RT-77004
7. AUTHOR(*) Sisto, Fernando Tokel, Halil		8. CONTRACT OR GRANT NUMBER(*) N00014-76-C-0540
Stevens Institute of Tech Castle Point Station Hoboken, N. J. 07030		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NR 094-363
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research		November 1977
207 West 24th St. New York, N. Y. 10011		13. NUMBER OF PAGES 38
14. MONITORING AGENCY NAME & ADDRESS(II different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING

This document has been approved for public release and sale; its distribution is unlimited

- 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, If different from Report)
- 18. SUPPLEMENTARY NOTES

None

19. KEY WORDS (Continue on reverse side if necessary and identity by block number)

Aeroelasticity; Nonstationary Aerodynamics; Vibration; Flutter in Cascade; Computational Fluid Dynamics.

ABSTRACT (Continue on reverse aide if necessary and identify by block number)
The dynamic stall of an airfoil with leading edge bubble separation is analyzed. The stall flutter of turbomachine blading often involves periodic growth and collapse of such a bubble.
The mathematical model representing the physical problem is presented. A flat plate undergoing harmonic oscillations with time dependent point of re-attachment is studied for the perturbed aerodynamic reactions & applications to the stall flutter problem.

DD 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

